


Y STARINER 215

- Body construction 215 Y 2"-24"
- Face to face ISO 5752
- Flanges EN 1092-2
- Max working pressure PN 16
- Temperature range -20°C + 140°C according to material
- Coating Epoxy min 80 micron UV resistance
- Tightness test According to EN 12266-1:2003
- Material certificate EN 10204.3.1
- Screen 2"-8" 50% holes of Ø 3.25 mm
10"-24" 50% holes of Ø 5 mm




Materials Model 215

Item	Description	Material
1	Body	Ductile Iron/ Cast Iron
2	Cover	ST-37/ Cast Iron
3	Screen	SS304/ 316
4	Screw/Nut	SS/ Galvanized steel
5	Gasket	NBR/ EPDM
6	Plug	Galvanized steel

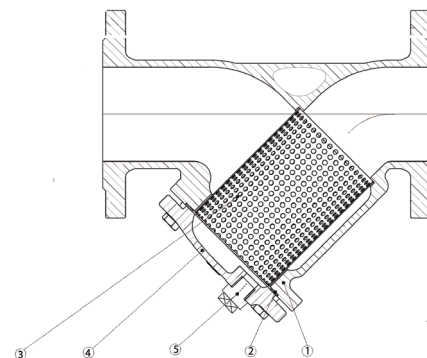

Dimensions Model 215

mm	50	60	80	100	150	200	250	300	350	400	500	600
Inches	2"	2.5"	3"	4"	6"	8"	10"	12"	14"	16"	20"	24"
L	203	222	241	305	360	495	590	620	980	1100	1250	1450
D	165	185	200	218	285	340	405	460	520	580	715	840
D2	125	145	160	180	240	295	350 355	400 410	470	525	650	770
b	16	16	16	16	16	17	19	20	26.5	28	32	36
H	130	152	165	210	261	358	437	492	610	690	870	1025

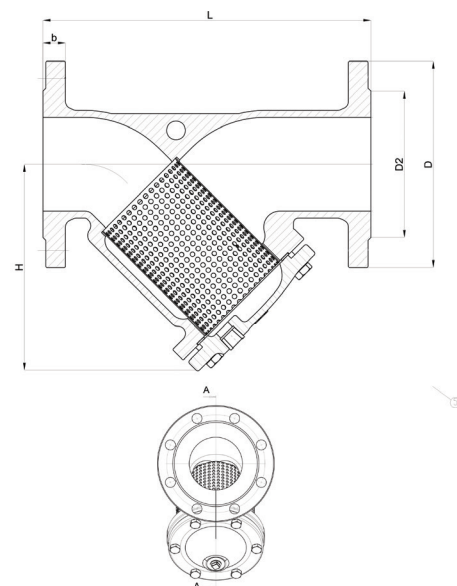

Note: Due to company's policy of continuous improvement, Hakohav Valves reserves the right to change specification without prior notice.