



- Body construction Hav 28"-40"
- Face to face EN 558-1/ ISO 5752 series 14 (DIN 3202 F4)
- Max working pressure PN 16
- Temperature range -20°C + 140°C according to material
- Operation Handwheel
T key
Electric actuator
- Coating Standard: Rilsan (Nylon 11)
Optional: Epoxy/ Enamel (internal)
- Flanges acc. to EN 1092-2 (ISO 7005-2) PN 10/PN 16
AS 4087 (BS Table D)

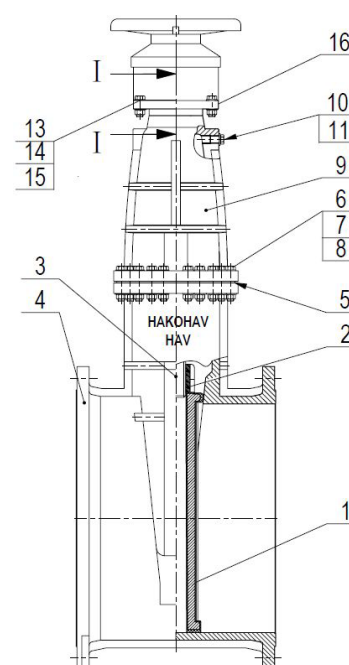

Materials

Item	Description	Material
1	Wedge	Ductile Iron +EPDM
2	Stem nut	Brass
3	Stem	SS 420
4	Body	Ductile Iron
5	Gasket	EPDM
6	Bonnet Bolt	SS 304
7,14	Nut	SS 304
8, 15	Washer	SS 304
9	Bonnet	Ductile Iron
10	Plug	Brass
11, 20	Minipad	TFL
12	Flat key	Carbon Steel
13	Gear box bolt	SS 304
16	Gland	Ductile Iron
17, 21, 22	O- ring	EPDM
18, 19	Bearing	Component
23	Seal ring	Brass
24	Dust ring	EPDM



Dimensions

mm	700	800	900	1000	1200
inches	28"	30"	32"	36"	40"
L	430	470	510	550	630
D	90	1025	1125	1255	1485
H	1532	1705	1810	2035	2460

